


- 3 POWER CABLE
 - 1) ALL DIMENSIONS ARE FOR REFERENCE ONLY. CABLE TO MATCH APPROVED SAMPLE.
 - 2) FUSES TO BE BAGGED AND ATTACHED TO CABLE INCLUDING THE FOLLOWING: FUSEHOLDER (BUSSMAN HEB-AA) AND FUSES (20 AMP BAF20) OR EQUIVALENT.
 - 3) TERMINALS TO CONFORM TO DIMENSIONS SHOWN. TERMINALS TO BE PLATED AND MUST CONFORM TO AMP CAT #322242 OR EQUIVALENT.
 - 4) WIRE TO BE #10 AWG STRANDED TINNED COPPER. WIRE (105 STRANDS OF #30 AWG) UL-TYPE 1015 WITH TEMP RATING OF 105 DEG C (EGE 19A115959).

REVISIONS									
REV			DESCRIPTION	DATE	APPROVED				
2B	RE	C PA	RT 3 ISSUED THIS REV	08JUN95	G.R.				
3	AN	2045	6						
4	RE	C-AD	DED SHEET 4	12MAY97	OT COX				
5	NC) CHA	NGE						
6 ECO 2001		0 20	012338	20AUG02	(B.Y.)				

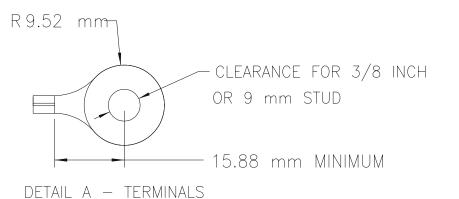

CONNECTOR WITH JACK SCREWS SIMILAR TO

JAPAN RADIO COMPANY P/N B19/H-6JWLD00004

OR EQUIVALENT.

SH 3 REV

B Dwg No

19B802622

- 6) MARK PART NUMBER 19B802622P3 CLEARLY AND PERMANENTLY ON CABLE.
- 7) CABLE MUST PROVIDE A DRIVEN RAIN WEATHERPROOF SEAL PER MIL—STD—810E. NO WATER ENTRY INSIDE CONNECTOR OR ONTO PINS ALLOWED.

PURCHASE FROM AN APPROVED VENDOR

PURCHASING TO SUPPLY VENDOR WITH COPIES OF THIS DRAWING AND 19A700070 MATERIAL MUST MEET EGE
INCOMING INSPECTION AND TEST
SAMPLE PER 19A700070

l	INLESS OTHERWISE SPECIFIED	SIGNATURES	DATE	ERICSSON GE MOBILE COMMUNICATIONS INC.		
	DIMENSIONS ARE IN MM OLERANCES ON	DRAWN B BOWLES	08JUN95	ERICSSON ERICSSON INC. ERICSSON GE MOBILE COMMUNICATIONS INC.		
	2 PL DECIMALS ± 3 PL DECIMALS ± ANGLES ± FRACTIONS ±	CHECKED W.K.	08JUN95			
		ENGRG G REYNOLDS	08JUN95	CABLE, PWR		
	TRACTIONS ±	ISSUED				
		802622S1R_				
	"B" SIZE	FMF D2		SIZE FSCM NO DWG NO 19B802622	<u>.</u>	
	FILE=19B802622s3	FCFO INDEX 344A4100				

THIRD ANGLE PROJECTION

EC 1