

future
The Future of Mobile Radio

Orion™
29 - 50 MHz
Scan and System Mobile Radio

TABLE OF CONTENTS

Synthesizer/Receiver	LBI-39138
Power Amplifier	LBI-39139
PA Interface.....	LBI-38994
Control Logic/IF Board	LBI-39145
Control Units	
344A4581P1-P4	LBI-38992
KRY 101 1632/11-/14	AE/LZB 119 3326/1
Assemblies.....	LBI-38909
Service Section	LBI-39140

NOTICE!

This manual covers M/A-COM Private Radio Systems, Inc. products manufactured and sold by M/A-COM Private Radio Systems, Inc.

NOTICE!

Repairs to this equipment should be made only by an authorized service technician or facility designated by the supplier. Any repairs, alterations or substitution of recommended parts made by the user to this equipment not approved by the manufacturer could void the user's authority to operate the equipment in addition to the manufacturer's warranty.

NOTICE!

The software contained in this device is copyrighted by M/A-COM Private Radio Systems, Inc. Inc. Unpublished rights are reserved under the copyright laws of the United States.

This manual is published by **M/A-COM Private Radio Systems, Inc.**, without any warranty. Improvements and changes to this manual necessitated by typographical errors, inaccuracies of current information, or improvements to programs and/or equipment, may be made by **M/A-COM Private Radio Systems, Inc.** at any time and without notice. Such changes will be incorporated into new editions of this manual. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, for any purpose, without the express written permission of **M/A-COM Private Radio Systems, Inc.**

TABLE OF CONTENTS

	<u>Page</u>
SPECIFICATIONS	3
DESCRIPTION	5
SYNTHESIZER	5
PROGRAMMING	5
TRANSMITTER	5
RECEIVER	5
SYSTEM CONTROL FUNCTION	5
OPERATION	5
MAINTENANCE	5
PARTS LIST (Radio Unit)	6
SYSTEM INTERCONNECTION DIAGRAM	7

SPECIFICATIONS*

Frequency Range:	29-42 MHz, 35-50 MHz
Battery Drain:	
Receive	
Squelched	1.1 Amperes at 13.8 Volts
Unsquelled	3.0 Amperes at 13.8 Volts (15 Watts Output)
Transmitter:	
60 Watts	16 Amperes at 13.2 Volts
110 Watts	28 Amperes at 13.6 Volts
Frequency Stability:	0.0005% depending on model
Temperature Range:	-30°C (-22°F) to +60°C (+140°F)
Duty Cycle:	100% Receive, 14% Transmit
<u>Transmitter</u>	
Transmit Output Power:	60/110 Watts
Conducted Spurious:	-85 dB
Modulation:	±5 kHz
Audio Sensitivity:	55 to 110 millivolts
Audio Frequency Characteristics:	Within +1 dB to -3 dB of a 6 dB/octave pre-emphasis 300 Hz and within +1 dB to -4.5 dB of a 6 dB/octave pre-emphasis 3000 Hz per EIA standards. Post-limiter filter per FCC and EIA.
Distortion:	Less than 2% (1000 Hz) Less than 5% (3000 Hz)
Deviation Symmetry:	0.3 kHz maximum

Continued

Continued

SPECIFICATIONS*

Maximum Frequency Separation:	29-42 MHz, 35-50 MHz
Microphone Load Impedance:	600 Ohms
Power Adjust Range:	100% to 50% of rated power (U.S.A. Models)
RF Output Impedance:	50 Ohms
FM Noise:	-50 dB
<u>Receiver</u>	
Audio Output:	15 Watts with less than 3% distortion (To 4.0 ohm speaker)
Sensitivity:	0.35 μ V (STD)/0.22 μ V (PRE) 12 dB SINAD (IEIA method)
Selectivity:	-85 dB EIA Two-Signal Method (20 kHz Channels)
Spurious Response:	-100 dB
Intermodulation 20 kHz:	-85 dB
Maximum Frequency Separation:	29-42 MHz, 35-50 MHz
Frequency Response:	Within +1, -3 dB of 6 dB/octave de-emphasis from 300 to 3000 MHz (1000 Hz reference)
RF Input Impedance:	50 Ohms
Hum/Noise ratio:	
Unsquelled	-50 dB
Squelled	-70 dB
Channel Spacing:	20 kHz

Regulatory Data

Frequency Range MHz	RF Output (Watts)	FCC ID	DOC Type Number	DOC Cert. Number
29-42	60/30	AXATR-337-A5	(ORION 30W ONLY) TR-337	287 194 318A
29-42	110	AXATR-338-A5	----	----
35-50	60/30	AXATR-337-B5	(ORION 30W ONLY) TR-337	287 194 318A
35-50	110	AXATR-338-A5		

* These specifications are typical values intended primarily for use of the service technician. Refer to the appropriate Specifications Sheet for the complete specifications.

DESCRIPTION

M/A-COM Private Radio Systems, Inc., synthesized **ORION** mobile radio combinations are completely solid-state, utilizing microcomputer technology and integrated circuits to provide high-quality, high-reliability radios. Standard low band combinations are equipped with:

- Microcomputer Controlled Frequency Synthesizer
- 0.0005% Frequency Stability
- Noise Blanker
- Other Structured Options

The basic radio consists of three printed wiring boards mounted in a cast aluminum frame. The three boards are:

1. The Control Logic/IF board
2. The Frequency Synthesizer/Receiver board
3. The Power Amplifier/Exciter board

The radio is of double-layer construction with tuning adjustments easily accessible.

The Control Logic/IF Board is located on the top of the radio, while the Power Amplifier/Exciter and the Synthesizer/Receiver boards are located on the bottom of the radio.

SYNTHESIZER

The synthesizer consists of a microcomputer, Electrically Erasable Read Only Memory (**EEPROM**), a frequency synthesizer IC, transmit and receive Voltage Controlled Oscillator's (**VCO**) and associated circuitry. The frequency synthesizer under control of the microcomputer generates all transmit and receive Radio Frequencies (**RF**).

The EEPROM stores binary data for all radio frequencies, Channel Guard tones/digital codes and the timing function of the Carrier Control Timer (**CCT**). The microcomputer accesses the EEPROM and provides the correct WALSH bits to the Channel Guard circuitry to generate the correct Channel Guard tone or digital code on a per-channel basis.

PROGRAMMING

The EEPROM allows the radio to be programmed or reprogrammed as needed to adapt to changing system

requirements. Radio Frequencies, Channel Guard tone and digital codes and the CCT function can be reprogrammed.

The EEPROM can be reprogrammed through the radio front connector using a personal computer. This programmer allows all information to be loaded simultaneously.

Programming instructions are provided in the respective Programmer Maintenance Manuals.

TRANSMITTER

The transmitter consists of the frequency synthesizer, transmitter VCO and a Power Amplifier (**PA**) assembly. The PA assembly consists of a PA board mounted on a heat sink assembly. The PA board also contains the exciter, low-pass filter and antenna switching diode.

Audio and Channel Guard circuitry for the transmitter is located on the Control Logic/IF Board.

RECEIVER

The receiver consists of the frequency synthesizer, RX VCO, injection amplifiers, front end, IF, limiter detector and noise blanker circuitry. Audio, squelch and Channel Guard circuitry for the receiver is located on the Control Logic/IF Board.

SYSTEM CONTROL FUNCTION

A microprocessor on the Control Logic/IF board controls the frequency synthesizer, the TX ON/OFF, the decoding of CTCSS tones, the generation of CTCSS tones, etc. The audio processor circuitry of the transmitter and the receiver are located on the Control Logic/IF board. Squelch circuitry and a connection to the digital **AEGIS** circuit is also located on the Control Logic/IF board.

OPERATION

Complete operating instructions for the **ORION** two-way radio are provided in Operator's Manual **LBI-38888** for the control unit used.

MAINTENANCE

The Service Section in maintenance manual **LBI-39140** contains the maintenance information to service this radio. The Service Section includes:

- Disassembly Procedures

- Replacement of IC's, chip capacitors and resistors
- Alignment procedures for the transmitter and receiver
- Troubleshooting Procedures and wave forms
- A mechanical layout for the radio is found in **ORION Assemblies Maintenance Manual LBI-38909**.


RADIO UNIT

**344A4576P1/JHM-171S60A, 344A4576P2/JHM-171S60B
344A4576P3/JHM-171S110A, 344A4576P4/JHM-171S110B**

Issue 1

SYMBOL	PART NUMBER	DESCRIPTION
A1	B19/CMF-132	Control Logic/IF Board (IF Section)
A1	B19/CMC-855	Control Logic/IF Board (Logic Section)
A2	B19/CMN-350A	Synthesizer/Receiver Board CMN-350A (Used In P1, P3)
A2	B19/CMN-350B	Synthesizer/Receiver Board CMN-350B (Used In P2, P4)
A3	B19/CFR-138	Noise Blanker
A1001	B19/CAH-505AL	PA Circuit CAH-505AL (Used In P1)
A1001	B19/CAH-505BL	PA Circuit CAH-505BL (Used In P2)
A1001	B19/CAH-505AH	PA Circuit CAH-505AH (Used In P3)
A1001	B19/CAH-505BH	PA Circuit CAH-505BH (Used In P4)
A1002	B19/CMH-1231LB	Interface

ORCC

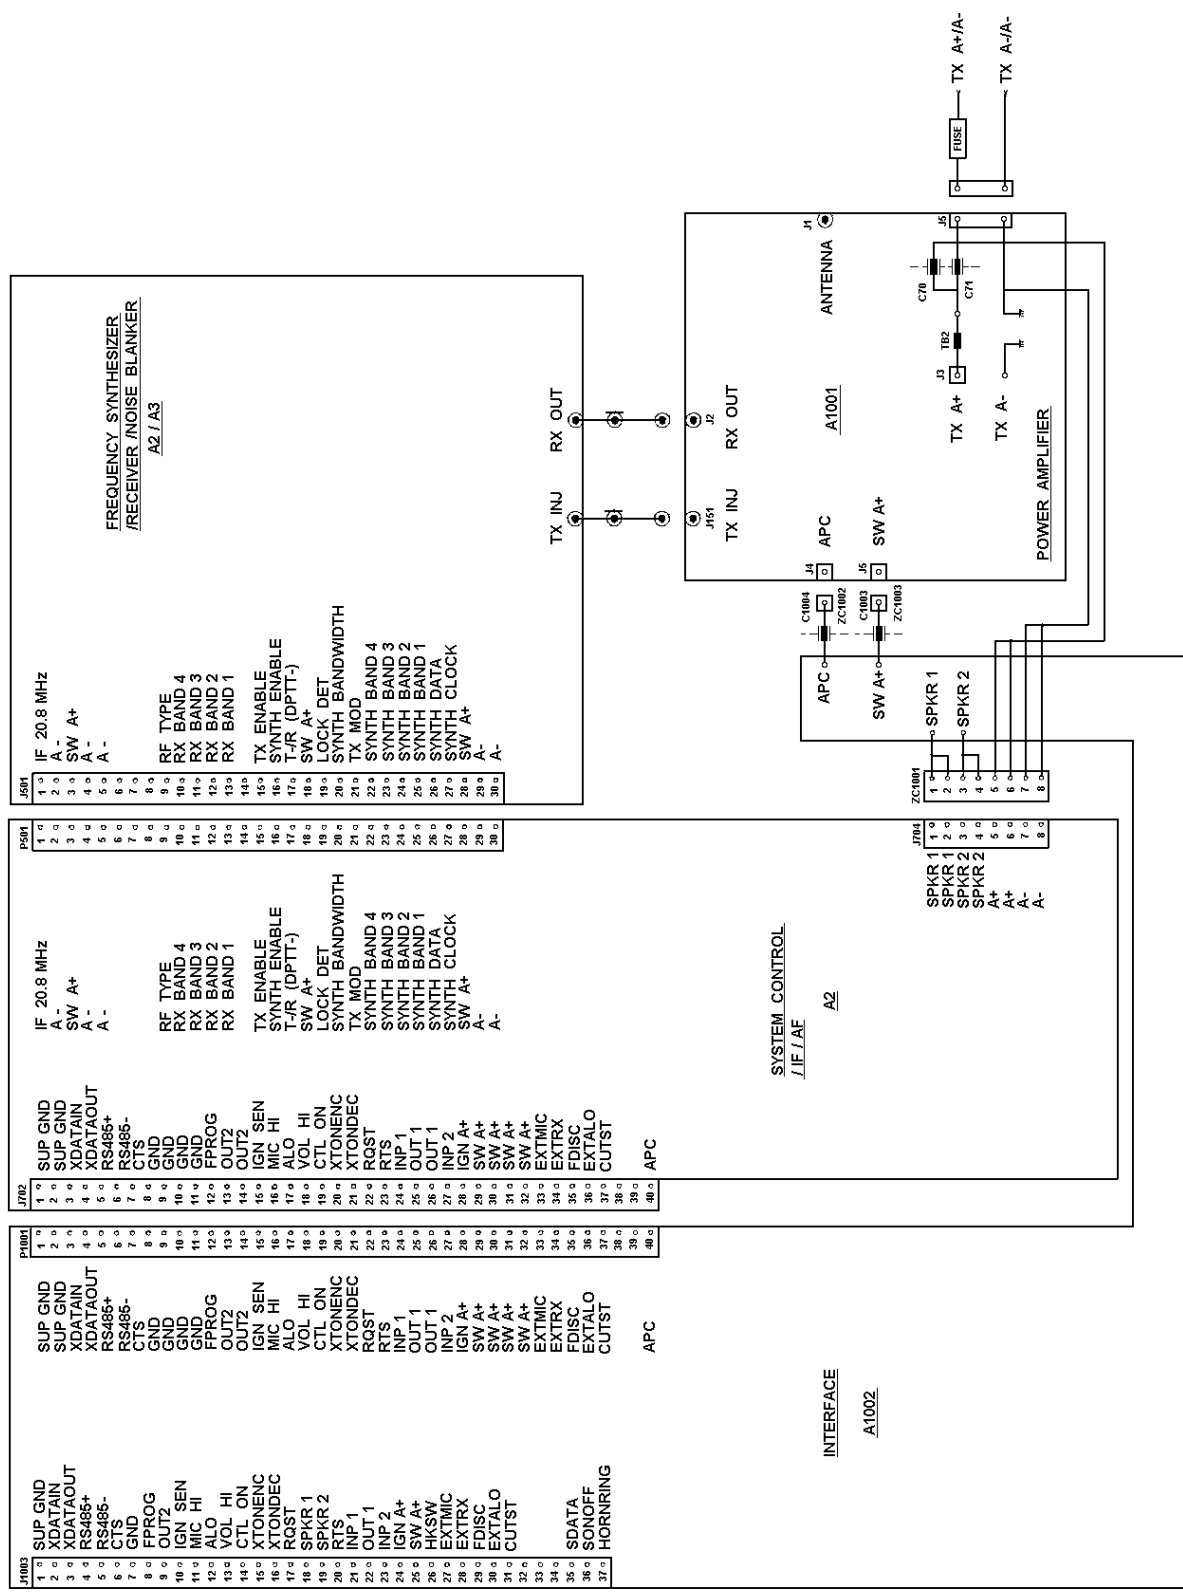

(DD00-JHM-171S)

M/A-COM Wireless Systems

3315 Old Forest Road

Lynchburg, Virginia 24501

(Outside USA, 434-385-2400) Toll Free 1-800-385-2400

www.macom-wireless.com

Printed in U.S.A.